

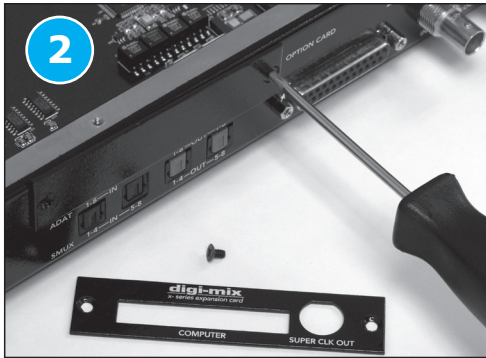
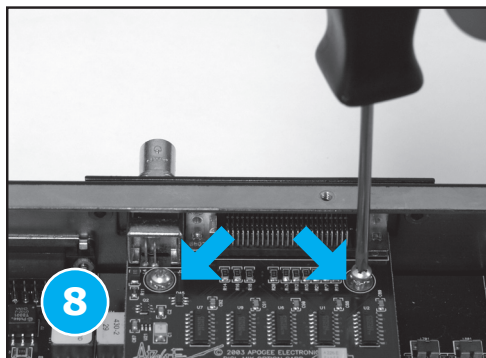


Installing the X-Symphony card

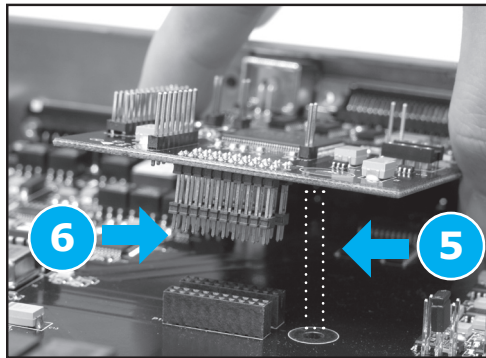

Your X-Symphony card should include the following:

- 1 X-Symphony circuit card
- 1 X-Symphony Coverplate
- 2 aluminium standoffs
- 1 plastic standoff

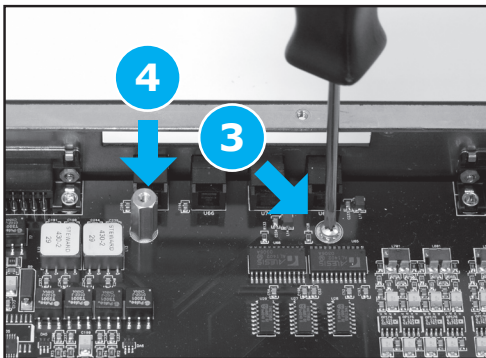

- 1 Remove the top cover of the host interface.
- 2 Remove the Option Card coverplate, and set aside the screws for later use.
- 3 Remove the two interface circuit board screws indicated at left, and set them aside for later use
- 4 Install the two aluminium standoffs in the threaded holes vacated by the screws.
- 5 On the X-Symphony card, install the plastic standoff in the hole adjacent to the multi-pin motherboard connector.
- 6 Insert the Port connector end of the X-Symphony card through the host unit back panel, and carefully place the multi-pin motherboard connector in the mating connector found on the host interface motherboard.
- 7 After verifying the alignment of the multi-pin and the mating connectors, firmly press down on the X-Symphony card, over the connector, until the pins are completely seated in the mating connector.
- 8 Re-install the circuit board screws from Step 3 in the locations indicated below.
- 9 Install the X-Symphony coverplate, and secure it to the host interface using two screws from Step 2.
- 10 Replace the top cover of the host interface.

